

PROGRAMMABLE DRAW WIRE SENSOR

AWP 515

“Analog or CANopen Output,
High Accuracy”




- Measuring length up to 15000 mm
- Magnetic absolute measurement technology
- Robust stainless steel measuring wire
- Aluminium housing
- Analog or CANopen output
- Programmable analog output option
- IP54 protection class (Optional IP67)
- Compact design and easy mounting
- 1 m/s maximum movement speed
- Shock/vibration resistant

MECHANICAL DATA


| | |
|---------------------------------|---------------------------------|
| Measuring Range (stroke) | Up to 15000 mm |
| Max. Movement speed | 1 m/s |
| Extension Force | 12N |
| Protection Class | IP54 (Optional IP67) |
| Operating Temperature | -40°C...+85°C |
| Material | Body: Aluminium |
| | Measuring wire: Stainless steel |

MECHANICAL DIMENSIONS (mm)



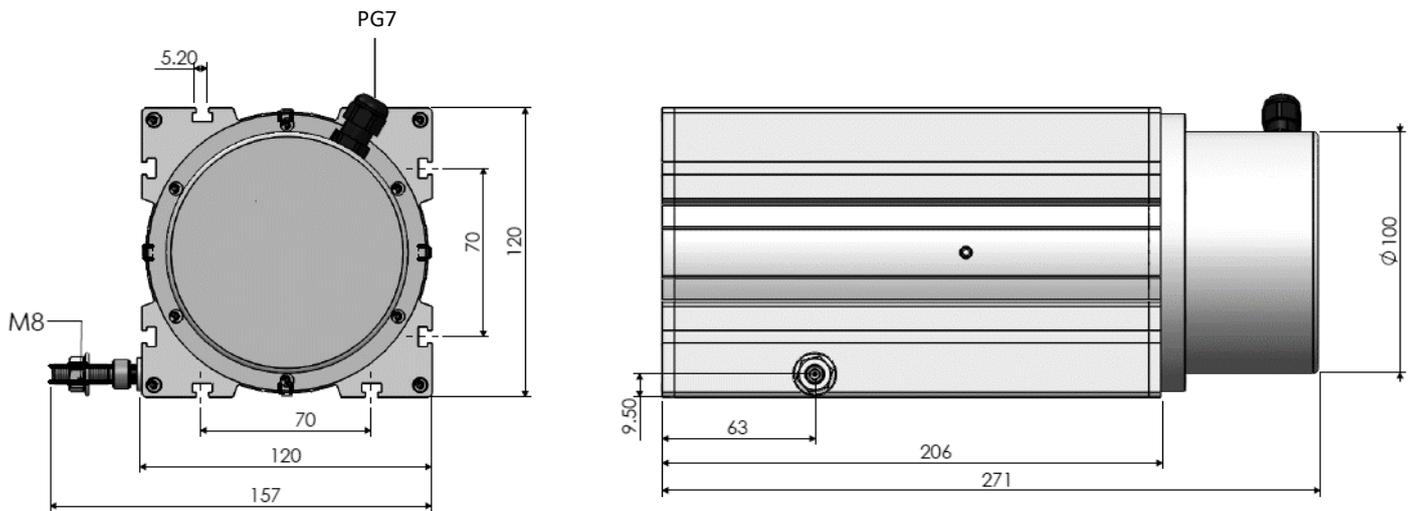


MOUNTING AND WARNINGS



1. Never release the wire after pulling. Otherwise, the coil spring will be damaged.

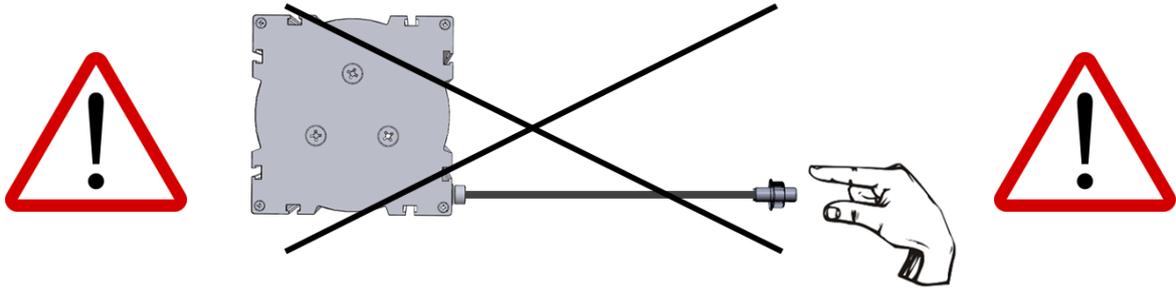



2. Mount the sensor according to the mounting directions shown below.

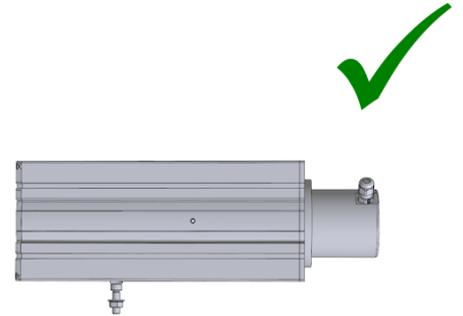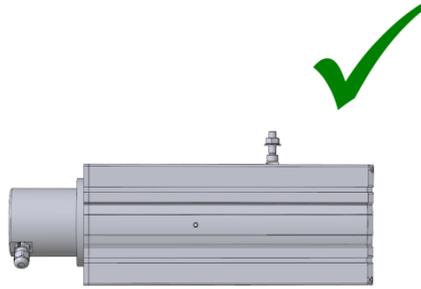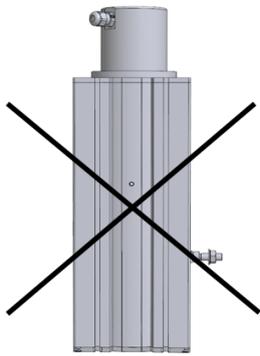

3. If there is a trickle of water (like a rain), the wire outlet must not be a drip of water upstream. If needed please use guide rollers.

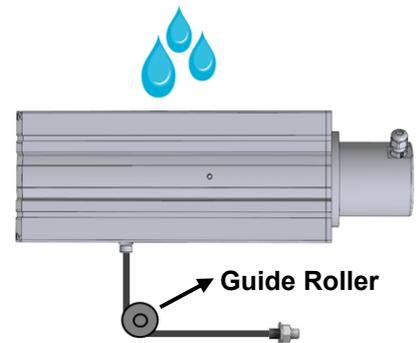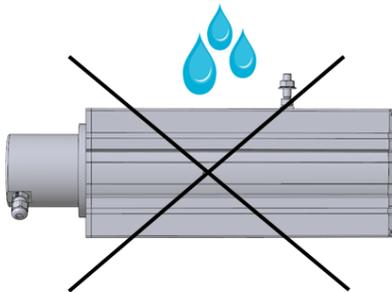

4. The wire should not be pulled in angular. If needed, please use guide rollers.

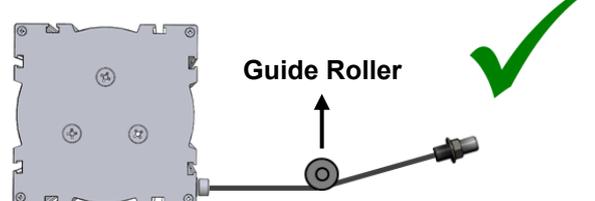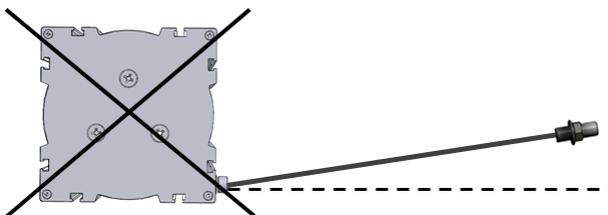

Important Note(!): Failure to comply with these recommendations, the malfunctions that may occur will not be under the warranty.

ANALOG VERSION

Electrical Specifications

| | |
|-----------------------------|---|
| Measuring range | Up to 15000 mm |
| Supply voltage | 15...26 VDC |
| Current consumption | ≤60 mA |
| Reverse polarity protection | Yes |
| Short circuit protection | Yes (only supply) |
| Response frequency | 500 Hz |
| Resolution | 0.05 mm |
| Linearity | ±%0.5 FS |
| Output signal | Voltage: 0-10V, 0.5-4.5V, 0-5V Current: 4-20 mA |
| Signal characteristics | Increasing (exmp: 4-20 mA) Decreasing (exmp:20-4 mA) |
| Sensing device | Magnetic absolute encoder |
| Electrical connection | M12 connector or cable |

Electrical Connection

| Signal | Cable | M12 / 5 pin male connector |
|----------------------|--------|----------------------------|
| V+ (15...26 VDC) | Red | Pin 1 |
| Analog output signal | Yellow | Pin 2 |
| GND | Black | Pin 3 |
| N/C | Green | Pin 4 |
| N/C | Pink | Pin 5 |



Order Code

| Model | Electrical Connection | Protection Class |
|-----------------------------------|--|---|
| AWP 515 - XXXX - XXXX - XX - XXXX | S13M: M12/5 pin male connector 2M: 2m cable *Optional others | No code : IP54 (std) E067 : IP67 |
| | Measuring Range Up to 15000 mm | Analog Output Signal V : 0-10 VDC V1 : 0-5 VDC A : 4-20 mA V3 : 0.5-4.5 VDC NV : 10-0 VDC NV1 : 5-0 VDC NA : 20-4 mA NV3 : 4.5-0.5 VDC |


ANALOG VERSION, PROGRAMMABLE

Electrical Specifications

| | |
|-----------------------------|--|
| Measuring range | Up to 15000 mm |
| Supply voltage | 15...26 VDC |
| Current consumption | ≤60 mA |
| Reverse polarity protection | Yes |
| Short circuit protection | Yes (only supply) |
| Response frequency | 500 Hz |
| Resolution | 0.05 mm |
| Linearity | ±%0.5 FS |
| Output signal | Voltage: 0-10V, 0.5-4.5V, 0-5V (programmable) Current: 4-20 mA (programmable) |
| Signal characteristics | Increasing (exmp: 4-20 mA) Decreasing (exmp:20-4 mA) |
| Sensing device | Magnetic absolute encoder |
| Electrical connection | M12 connector or cable |

Electrical Connection

| Signal | Cable | M12 / 5 pin male connector |
|----------------------|--------|----------------------------|
| V+ (15...26 VDC) | Red | Pin 1 |
| Analog output signal | Yellow | Pin 2 |
| GND | Black | Pin 3 |
| N/C | Green | Pin 4 |
| SPAN/ZERO | Pink | Pin 5 |





SETTING MEASUREMENT LIMITS: With this feature, you can set the minimum and maximum measurement limits.

In order to determine the **minimum measurement limit (lim1)**, the SPAN/ZERO and GND terminal are short-circuited for at least 3 seconds.

In order to determine the **maximum measurement limit (lim2)**, the SPAN/ZERO and GND terminal are short-circuited for at least 6 seconds.

To **return to the factory settings**, the SPAN/ZERO and GND terminal are short-circuited for at least 10 seconds.

SAMPLE SIGNAL OUTPUT GRAPHICS

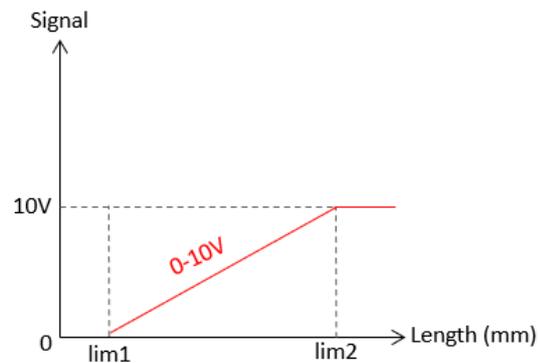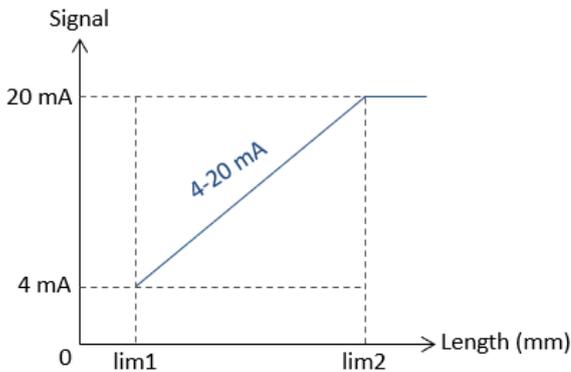

Order Code

| Model | | | | Electrical Connection | | | | Programming Feature | | | |
|--|--|--|--|--|--|--|--|-------------------------------------|--|--|--|
| AWP 515 - XXXX - XXXX - XX - XX - XXXX | | | | S13M: M12/5 pin male connector 2M: 2m cable *Optional others | | | | PL: Programmable | | | |
| Measuring Range | | | | Analog Output Signal | | | | Protection Class | | | |
| Up to 15000 mm | | | | V : 0-10 VDC V1 : 0-5 VDC A : 4-20 mA V3 : 0.5-4.5 VDC NV : 10-0 VDC NV1 : 5-0 VDC NA : 20-4 mA NV3 : 4.5-0.5 VDC | | | | No code : IP54 (std) E067 : IP67 | | | |

CANopen VERSION

Electrical Specifications


| | |
|-----------------------------|---------------------------|
| Measuring range | Up to 15000 mm |
| Supply voltage | 12...30 VDC |
| Current consumption | ≤60 mA |
| Reverse polarity protection | Yes |
| Short circuit protection | Yes (only supply) |
| Response frequency | 500 Hz |
| Resolution | 20 µm |
| Linearity | ±%0.5 FS |
| Sensing device | Magnetic absolute encoder |
| Electrical connection | M12 connector or cable |

CANopen Specifications

| | |
|------------------------|---|
| Communication Profile | CiA 301 |
| Device Type | CANopen, CiA DS406 |
| Node ID | Adjustable from 1 to 127 with LSS or SDO |
| Baud Rate | 10 kBit/s, 20 kBit/s, 50 kBit/s, 100 kBit/s, 125 kBit/s, 250 kBit/s, 500 kBit/s, 800 kBit/s, 1 Mbit/s |
| PDO Data Rate | 100 ms |
| Error Control | Heartbeat, Emergency Message |
| PDO | 3 Tx PDO |
| PDO Modes | Event/Time triggered, Synch/Asynch |
| SDO | 1 server |
| Position Information | Object Dictionary 0x6020 |
| Termination Resistance | Optional 120Ω |

Electrical Connection

| Signal | Cable | M12 / 5 pin male connector |
|-----------------|------------|----------------------------|
| CAN SHIELD | CAN SHIELD | Pin 1 |
| V+ (12...30VDC) | Red | Pin 2 |
| GND | Black | Pin 3 |
| CAN_H | Yellow | Pin 4 |
| CAN_L | Green | Pin 5 |



Order Code

| Model | Electrical Connection | Protection Class |
|-----------------------------------|--|-------------------------------------|
| AWP 515 - XXXX - XXXX - X - XXXX | S13M: M12/5 pin male connector 2M: 2m cable *Optional others | No code : IP54 (std) E067 : IP67 |
| Measuring Range Up to 15000 mm | Output Signal C : CANopen | |